

KGM05AR71E221KH Datasheet

(0402 25 V X7R 220pF ±10%)

To download data and simulation models visit: **SpiCAT** ONLINE TOOL



Dimensions




	millimetres	inches
L	1 ± 0.1	0.039 ± 0.004
W	0.5 ± 0.1	0.02 ± 0.004
T max.	0.56	0.022
t	0.25 ± 0.15	0.01 ± 0.006


Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	pF	198 to 242	@ 1 kHz, 1 Vrms
DF	%	12.5 max.	@ 1 kHz, 1 Vrms
IR	GΩ	100 min.	@ 25 Vdc, t = 120 s
DWV	Vdc	62.5	@ I ≤ 50mA, t ≤ 5 s
Operating Temperature		-55°C to +125°C	
Dielectric		X7R	
Product Level		General	
RoHS Compliant		Yes	
Termination		Sn	

Electrical Characteristics

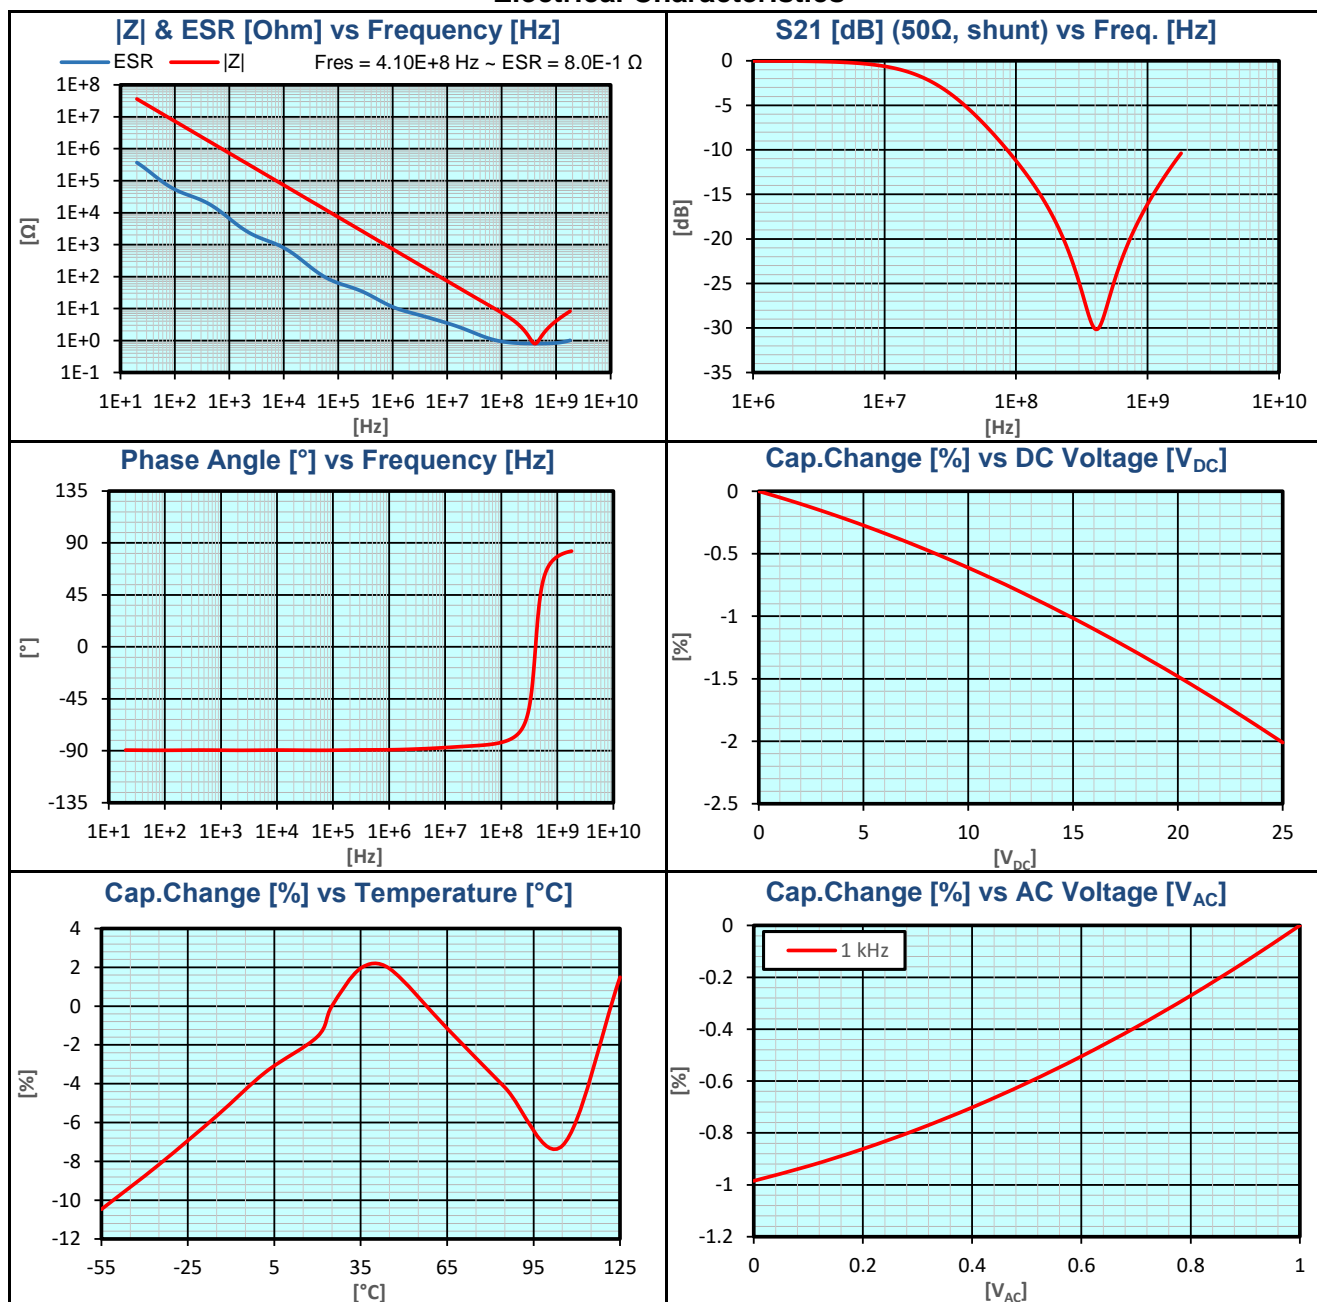

Electrical Characteristics

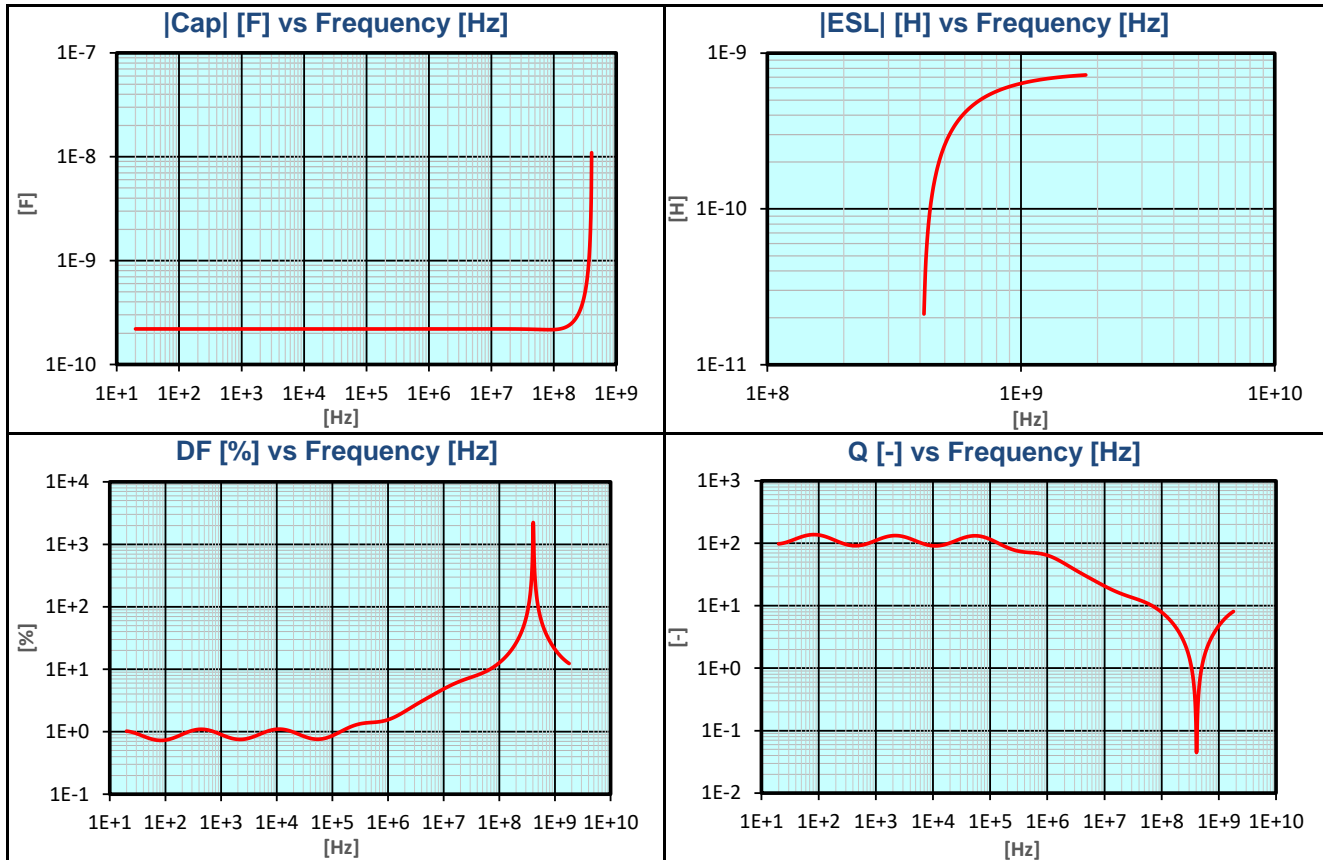

KGM05AR71E221KH Datasheet



(0402 25 V X7R 220pF ±10%)

Part Number Information

K	G	M	21	C	R5	1E	103	K	T	###
Symbol:	Product Level:	Requirement:	Size:	Thickness:	Dielectric:	Voltage:	Capacitance:	Tolerance:	Packing:	Optional:
KAVX	G General	M Standard	Code: EIA:	See catalog	CG C0G	Multiplier: Base:	(2 significant digits + no of zeros)	A ± 0.05 pF	H	See catalog for optional codes
A Automotive	U Hi-Q (Special function)	E ESD (Special function)	02 01005	for list of codes	R5 X5R	0 1x A 1		B ± 0.1 pF	T	
(AEC-Q200)			03 0201		S6 X6S	1 10x N 1.5		C ± 0.25 pF	U	
M Medical	L Low Inductance reverse Geometry		05 0402		T6 X6T	2 100x D 2		D ± 0.5 pF	Y	
	A Low Inductance LGA		15 0603		R7 X7R	3 1000x E 2.5		F ± 1 %	V	
	F Flexitem (Special function/structure)		21 0805		S7 X7S	U 3		G ± 2 %		
	S Flexisafe (Special function/structure)		31 1206		T7 X7T	V 3.5		J ± 5 %	M	
	G Gold Termination (Special Structure)		32 1210		R8 X8R	G 4		K ± 10 %	L	
	C IDC (Special structure)		42 1808		L8 X8L	H 5		M ± 20 %	N	
	Q Ultra Low ESR		43 1812		G8 X8G	J 6.3			K	
			44 1825		V5 Y5V				S	
			55 2220							
			56 2225							
			91 3640							
						Example:				
						1E = 25V (10 x 2.5)			X	Waffle pack
Note: * See catalog for more information.										

NOTICE: Specifications are subject to change without notice. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee or responsibility of any kind, expressed or implied. Specifications are typical and may not apply to all applications.