

0402YC821JAZ2A Datasheet

(0402 16V X7R 820pF $\pm 5\%$ FLEXITERM®)

To download data and
simulation models visit: **SpiCAT**
ONLINE TOOL




	millimetres	inches
L	1 ± 0.1	0.039 ± 0.004
W	0.5 ± 0.1	0.02 ± 0.004
T max.	0.56	0.022
t	0.25 ± 0.15	0.01 ± 0.006


Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	pF	779 to 861	@ 1 kHz, 1 Vrms
DF	%	12.5 max.	@ 1 kHz, 1 Vrms
IR	G Ω	100 min.	@ 16 Vdc, t = 120 s
DWV	Vdc	40	@ I \leq 50mA, t \leq 5 s
Operating Temperature		-55°C to +125°C	
Dielectric		X7R	
AEC-Q200		Not qualified	
RoHS Compliant		Yes	
Termination		FLEXITERM®	

Electrical Characteristics

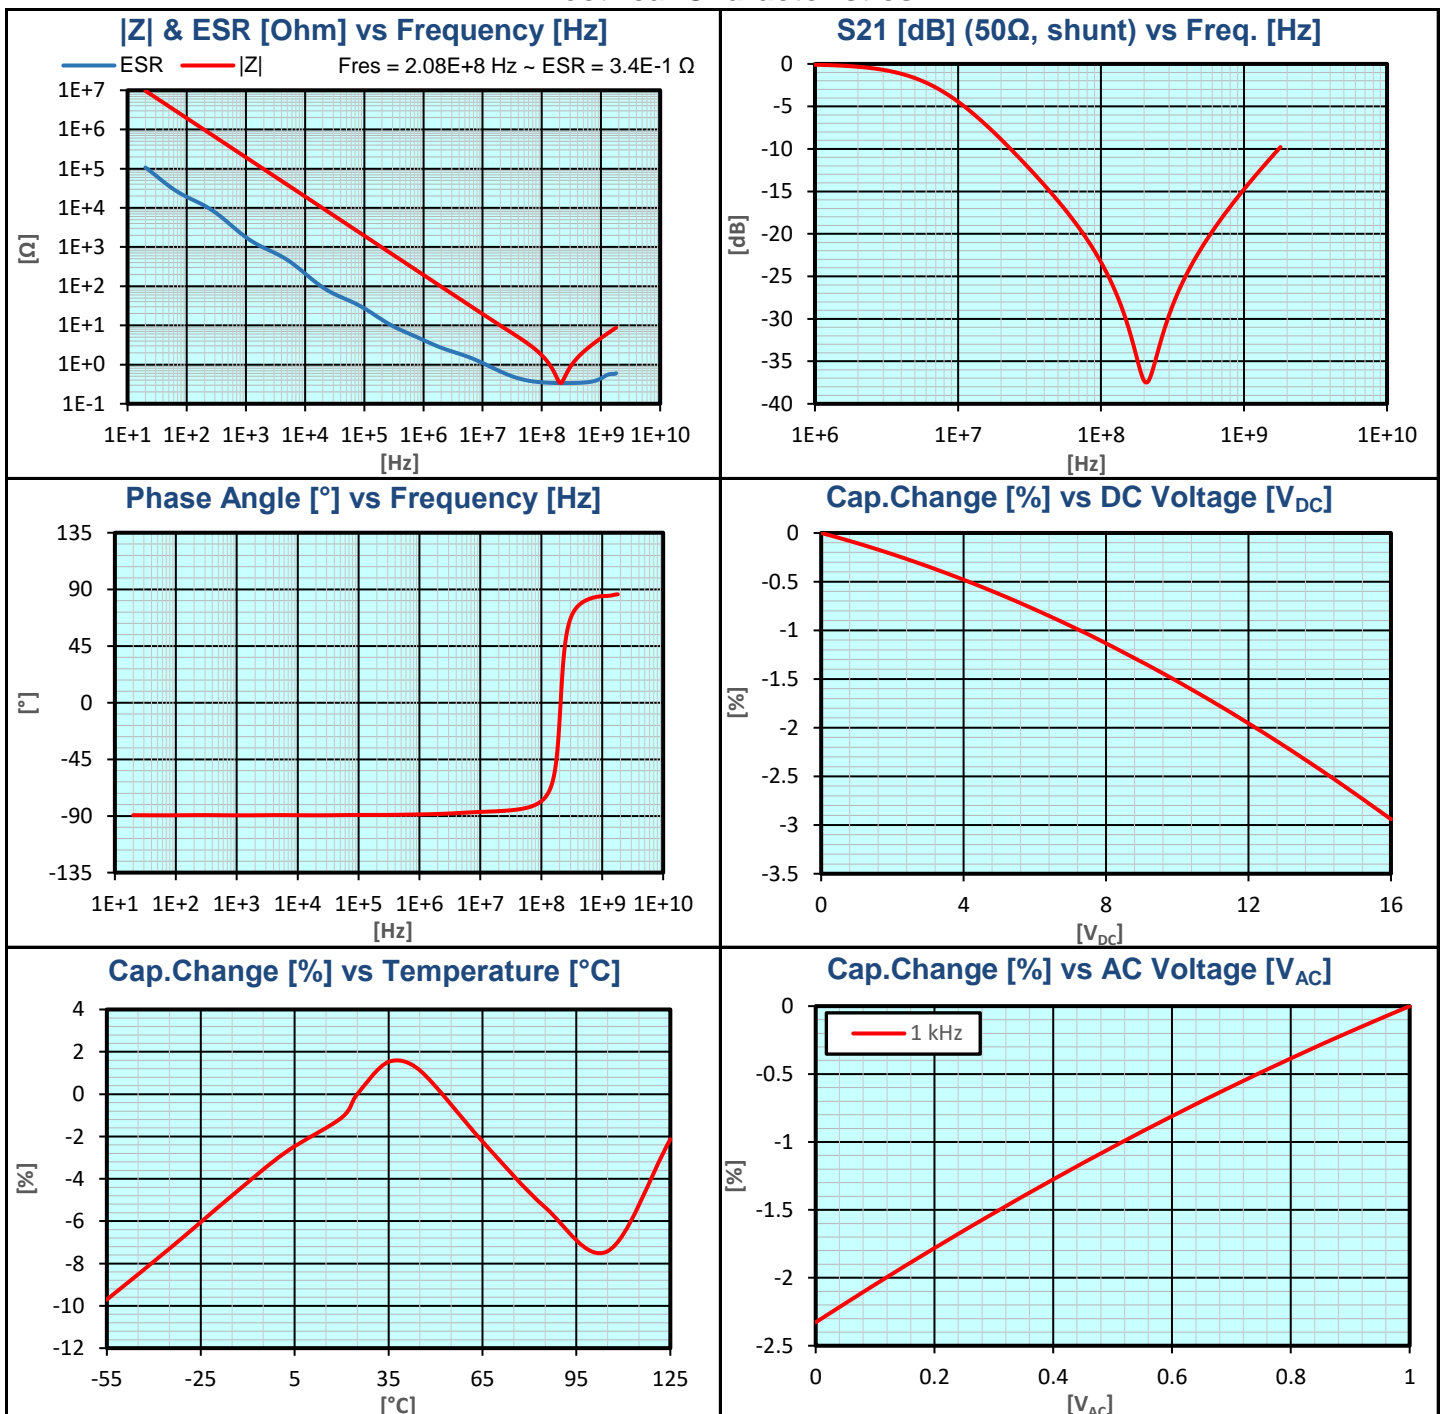

Electrical Characteristics

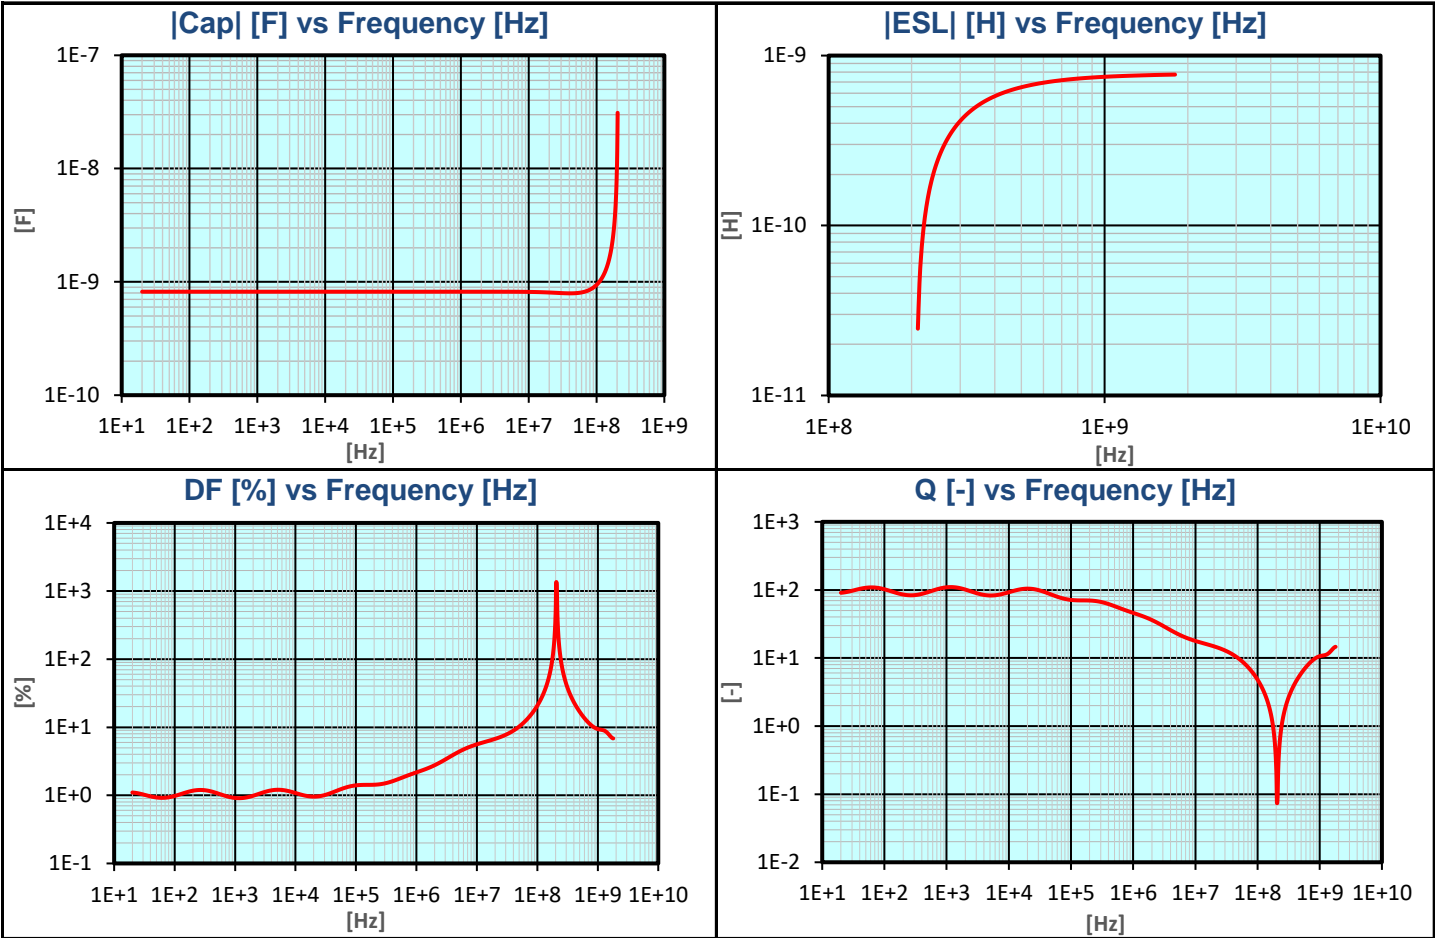

0402YC821JAZ2A Datasheet



(0402 16V X7R 820pF ±5% FLEXITERM®)

How To Order

<div>0805</div> <div>Size (L" x W")</div>	<div>5</div> <div>Voltage</div> <div>4V = 4 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 500V = 7</div>	<div>C</div> <div>Dielectric</div> <div>X7R = C</div>	<div>103</div> <div>Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros</div>	<div>M</div> <div>Capacitance Tolerance</div> <div>J = ± 5%* K = ±10% M = ± 20%</div> <div>*≤1µF only, contact factory for additional values</div>	<div>A</div> <div>Failure Rate</div> <div>A = Not Applicable 4=Automotive</div>	<div>T</div> <div>Terminations</div> <div>T = Plated Ni and Sn Z= FLEXITERM®** *Optional termination **See FLEXITERM® X7R section</div>	<div>2</div> <div>Packaging</div> <div>2 = 7" Reel 4 = 13" Reel</div> <div>Contact Factory For Multiples</div>	<div>A</div> <div>Special Code</div> <div>A = Std. Product</div>
<div>NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers. Contact factory for non-specified capacitance values.</div>								
<div>NOTICE: Specifications are subject to change without notice. All statements, information and data given herein are beleived to be accurate and reliable, but are presented without guarantee or responsibility of any kind, expressed or implied. Specifications are typical and may not apply to all applications.</div>								