

# 06035A150JAT2A Datasheet


(0603 50V C0G 15pF  $\pm 5\%$ )

To download data and  
simulation models visit:

**SpiCAT**  
ONLINE TOOL



## Dimensions






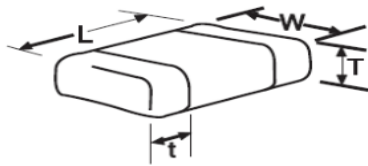


	millimetres (inches)
L	1.60 $\pm$ 0.15 (0.063 $\pm$ 0.006)
W	0.81 $\pm$ 0.15 (0.032 $\pm$ 0.006)
T max.	0.9 (0.035)
t	0.35 $\pm$ 0.15 (0.014 $\pm$ 0.006)

## Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	pF	14.25 to 15.75	@ 1 MHz, 1 Vrms
DF	%	0.143 max.	@ 1 MHz, 1 Vrms
IR	G $\Omega$	100	@ 50 Vdc, t = 60 $\pm$ 5 s
DWV	Vdc	125	@ I $\leq$ 50mA, t $\leq$ 5 s
Op. Temperature		-55 $^{\circ}$ C to +125 $^{\circ}$ C	
Dielectric		C0G (NP0)	
AEC-Q200		Not qualified	
RoHS Compliant		Yes	
Termination		Sn	

## Electrical Characteristics

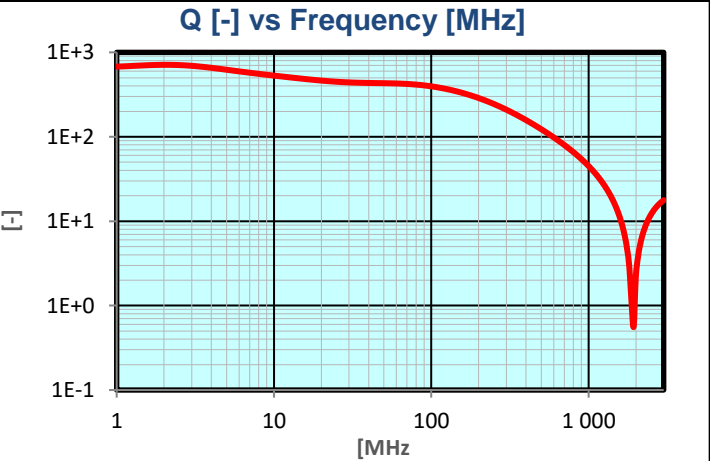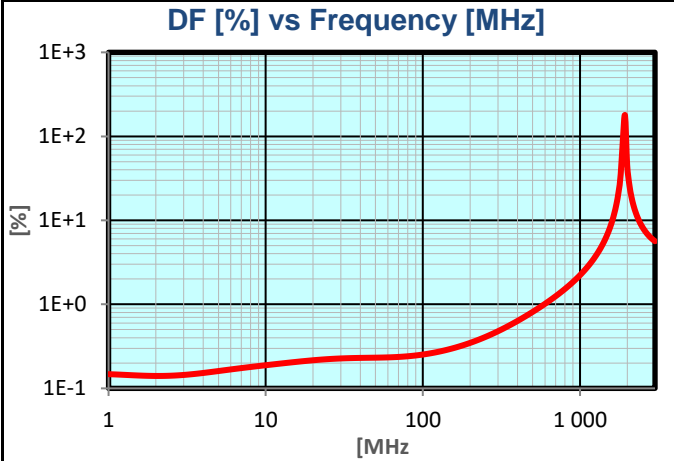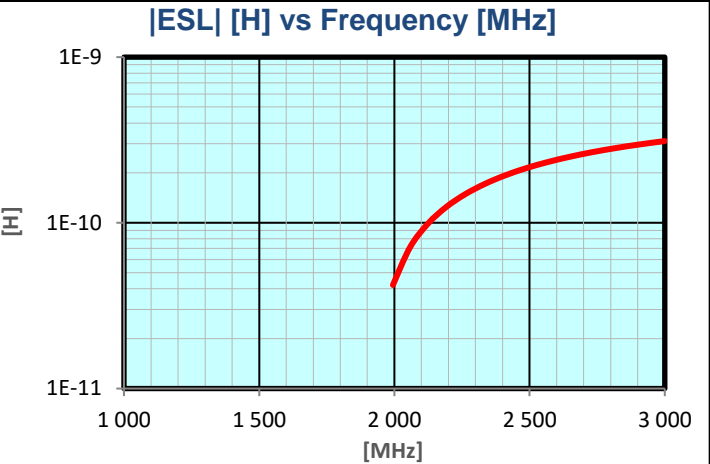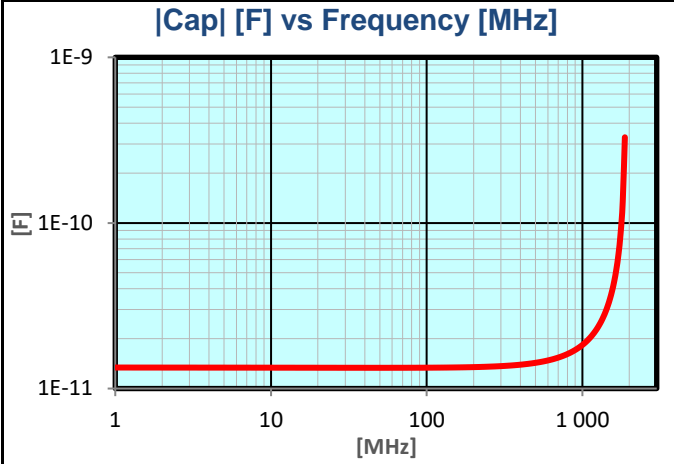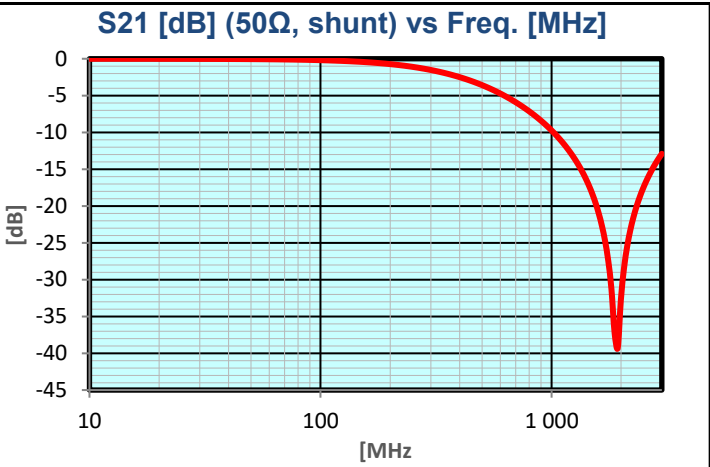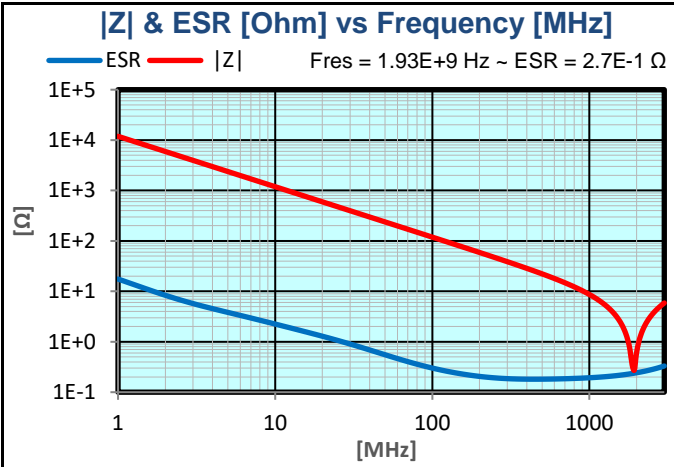


# 06035A150JAT2A Datasheet

(0603 50V C0G 15pF ±5%)



## Electrical Characteristics

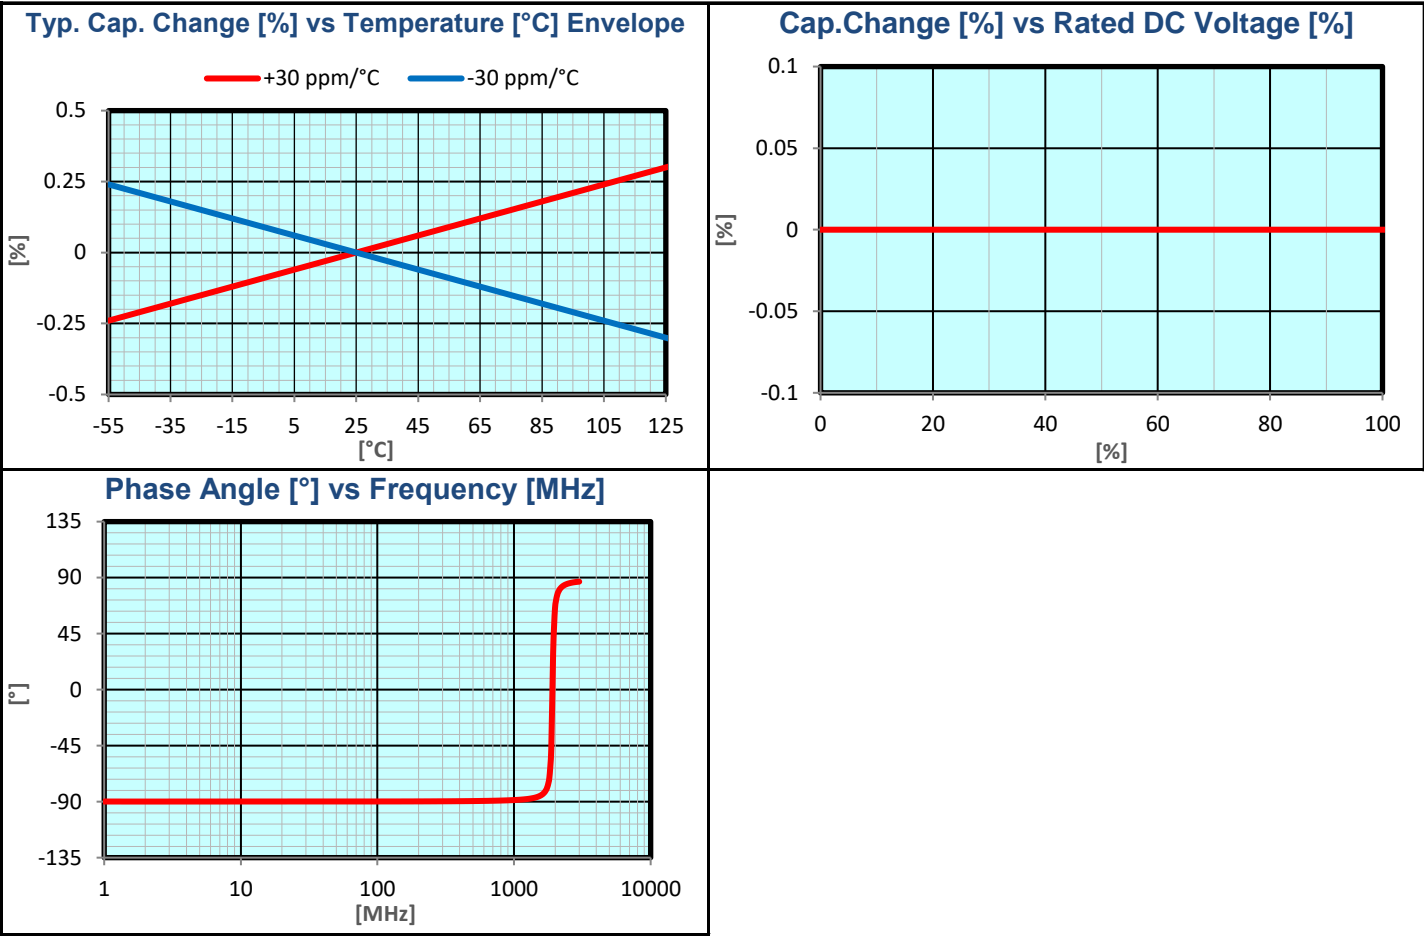

## How To Order

0805	5	A	101	J	4	T	2	A
Case Size	Voltage	Dielectric	Capacitance Code	Capacitance Tolerance	Failure Rate	Termination	Packaging/ Marking	Special Code
0402	Y = 16V	A = C0G (NP0)	(2 significant digits	B = ± 0.1 pF ( < 10 pF)	A = Standard	T = Plated Ni/Sn	2 = 7" Reel	A = Standard
0603	3 = 25V	Q = C0G (NP0)	+ no of zeros)	C = ± 0.25 pF ( < 10 pF)	4 = Automotive	U = Conductive Epo*	4 = 13" Reel	
0805	5 = 50V	Max. Temp. = 150°C		D = ± 0.5 pF ( < 10 pF)			U = 4mm TR	
1206	1 = 100V			F = ± 1 % ( ≥ 10 pF)			(01005)**	
	2 = 200V			G = ± 2 % ( ≥ 10 pF)				
	V = 250V			J = ± 5%				
	7 = 500V			K = ± 10%				
				M = ± 20%				

Note:

\*Automotive parts only

\*\*Standard parts only

0402 case size available in T termination only.

**Contact Factory For**

**1 = Pd/Ag\*\***

**7 = Gold Plated\*\***

**NOT RoHS COMPLIANT**

**NOTICE:** Specifications are subject to change without notice. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee or responsibility of any kind, expressed or implied. Specifications are typical and may not apply to all applications.