


12061C332JAZ2A Datasheet

(1206 100V X7R 3.3nF ±5% FLEXITERM®)

To download data and simulation models visit: **SpiCAT** ONLINE TOOL





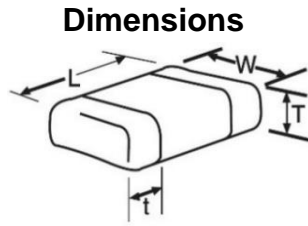


	millimetres	inches
L	3.2 ± 0.2	0.126 ± 0.008
W	1.6 ± 0.2	0.063 ± 0.008
T max.	0.94	0.037
t	0.5 ± 0.25	0.02 ± 0.01

Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	nF	3.135 to 3.465	@ 1 kHz, 1 Vrms
DF	%	10 max.	@ 1 kHz, 1 Vrms
IR	GΩ	100 min.	@ 100 Vdc, t = 120 s
DWV	Vdc	250	@ I ≤ 50mA, t ≤ 5 s
Operating Temperature		-55°C to +125°C	
Dielectric		X7R	
AEC-Q200		Not qualified	
RoHS Compliant		Yes	
Termination		FLEXITERM®	

Electrical Characteristics

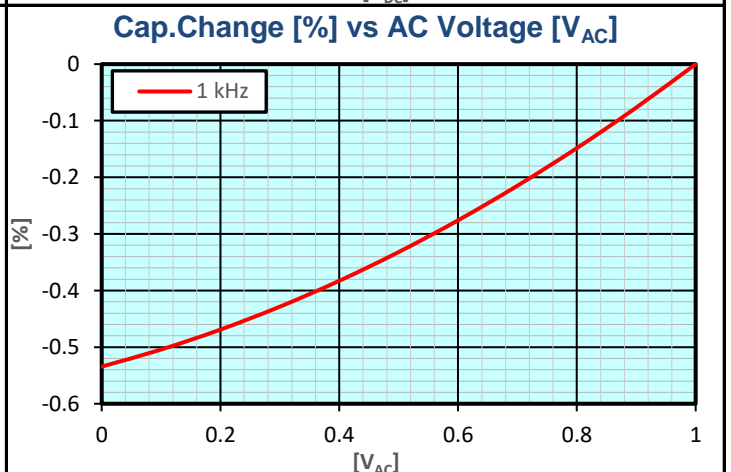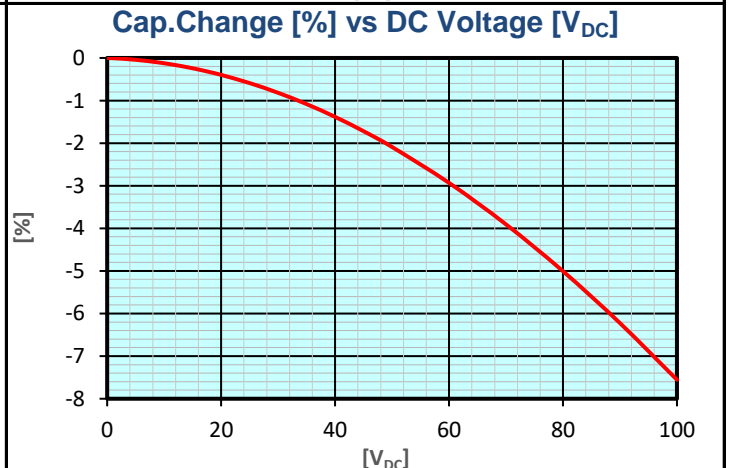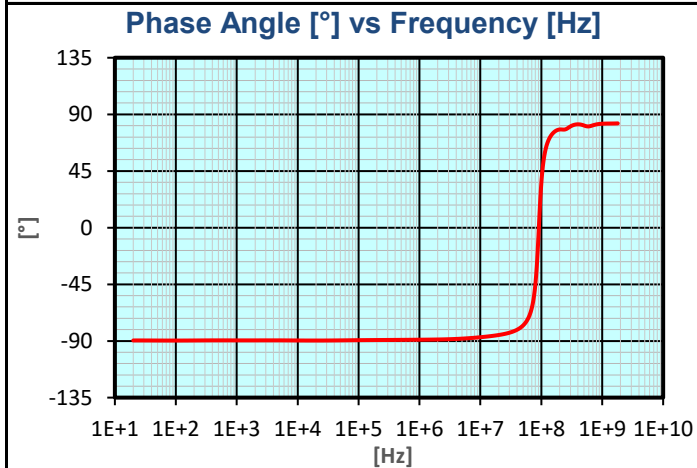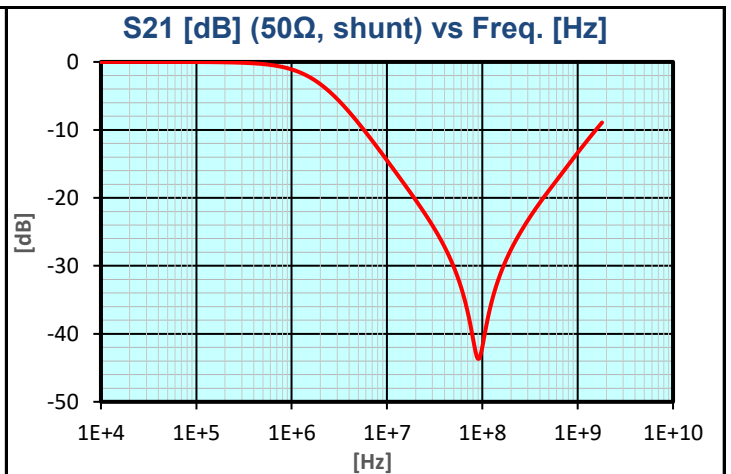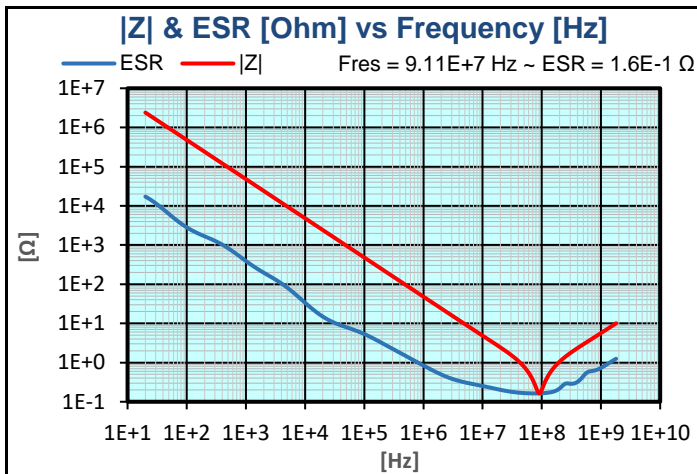


12061C332JAZ2A Datasheet

(1206 100V X7R 3.3nF ±5% FLEXITERM®)



Electrical Characteristics

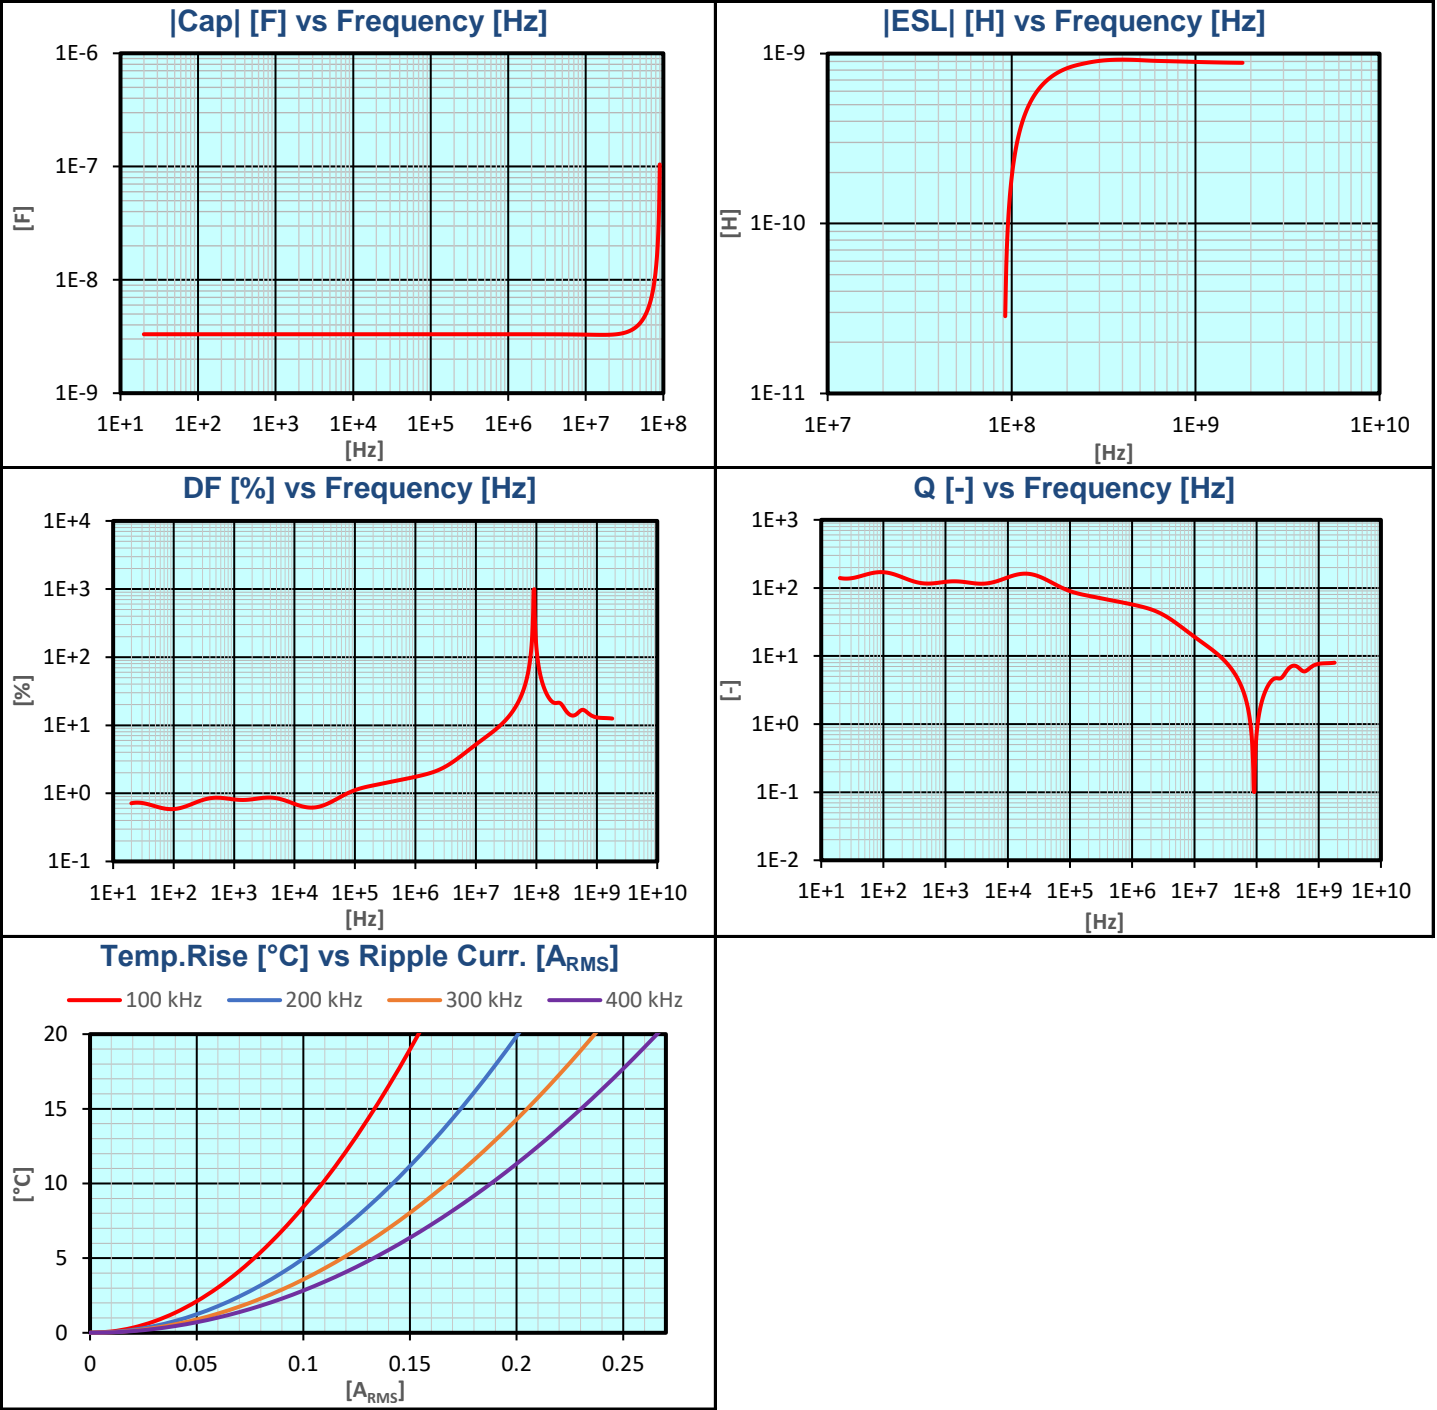

12061C332JAZ2A Datasheet



(1206 100V X7R 3.3nF ±5% FLEXITERM®)

How To Order

<div>0805</div> <div>Size</div> <div>(L" x W")</div>	<div>5</div> <div>Voltage</div> <div>4V = 4</div> <div>6.3V = 6</div> <div>10V = Z</div> <div>16V = Y</div> <div>25V = 3</div> <div>50V = 5</div> <div>100V = 1</div> <div>200V = 2</div> <div>500V = 7</div>	<div>C</div> <div>Dielectric</div> <div>X7R = C</div>	<div>103</div> <div>Capacitance</div> <div>Code (In pF)</div> <div>2 Sig. Digits +</div> <div>Number of Zeros</div>	<div>M</div> <div>Capacitance</div> <div>Tolerance</div> <div>J = ± 5%*</div> <div>K = ±10%</div> <div>M = ± 20%</div> <div> </div> <div>*≤1μF only,</div> <div>contact factory for</div> <div>additional values</div>	<div>A</div> <div>Failure</div> <div>Rate</div> <div>A = Not</div> <div>Applicable</div> <div>4=Automotive</div>	<div>T</div> <div>Terminations</div> <div>T = Plated Ni and Sn</div> <div>Z= FLEXITERM®**</div> <div> </div> <div>*Optional termination</div> <div> </div> <div>**See FLEXITERM®</div> <div>X7R section</div>	<div>2</div> <div>Packaging</div> <div>2 = 7" Reel</div> <div>4 = 13" Reel</div> <div> </div> <div>Contact</div> <div>Factory For</div> <div>Multiples</div>	<div>A</div> <div>Special</div> <div>Code</div> <div>A = Std.</div> <div>Product</div>
<div>NOTE:</div> <div>Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.</div> <div>Contact factory for non-specified capacitance values.</div>								
<div>NOTICE:</div> <div>Specifications are subject to change without notice. All statements, information and data given herein are beleived to be accurate and reliable, but are presented without guarantee or responsibility of any kind, expressed or implied. Specifications are typical and may not apply to all applications.</div>								