

# VCAS121018J390RP

(1210, 18Vdc, 1.6J, 500A, 3100pF, Sn Term)

Multilayer Chip Varistor Datasheet

## BASIC SPECIFICATION

Case Size [EIA]	1210
Operating Temperature	-55 to +125°C
Grade	Automotive
Qualification	AEC-Q200
Termination	Sn
RoHS	Yes
MSL Level	1
Packaging	T&R 7in (180mm)
Packaging Qty	2000 pcs



AEC-Q200  
Qualified



RoHS  
Compliant



Click for  
Online Data

## ELECTRICAL CHARACTERISTICS

DC Working Voltage	18 Vdc
AC Working Voltage	13 Vac
Breakdown Voltage [1mA DC]	25.5±10% V
Clamping Voltage [8x20µs]	42V @ 5A
Max Leakage Current [Vdc, 25°C]	10 µA
Transient Energy [10x1000µs]	1.6 J
Load Dump Energy [x10]	3 J
Peak Power [10x1000µs]	1200 W
Peak Current Rating [8x20µs]	500 A
Typical Capacitance [1kHz, 0.5Vrms, 25°C]	3100 pF
Capacitance Tolerance	+100/-50%
Jump Start Voltage [5min]	27.5 V
Power Dissipation	0.03 W

## DIMENSIONS



	mm	inches
L	3.20±0.20	0.126±0.008
W	2.49±0.20	0.098±0.008
T	1.7 max	0.067 max
t	1.14 max	0.045 max

## SOLDERING PAD




	mm	inches
A	1.02	0.04
B	2.03	0.08
C	4.06	0.16
D	2.54	0.1

## HOW TO ORDER


<b>VCAS</b>	<b>1210</b>	<b>18</b>	<b>J</b>	<b>390</b>	<b>R</b>	<b>P</b>
Varistor Chip Automotive	Case Size	Working Voltage	Energy Rating	Clamping Voltage	Packaging	Termination
		18 = 18 Vdc	J = 1.6J	390 = 42V	D = 7" reel (1,000pcs) R = 7" reel (2,000pcs) T = 13" reel (10,000pcs)	P = Sn

## TYPICAL CHARACTERISTICS


Temperature Derating (Energy, Current, Power)

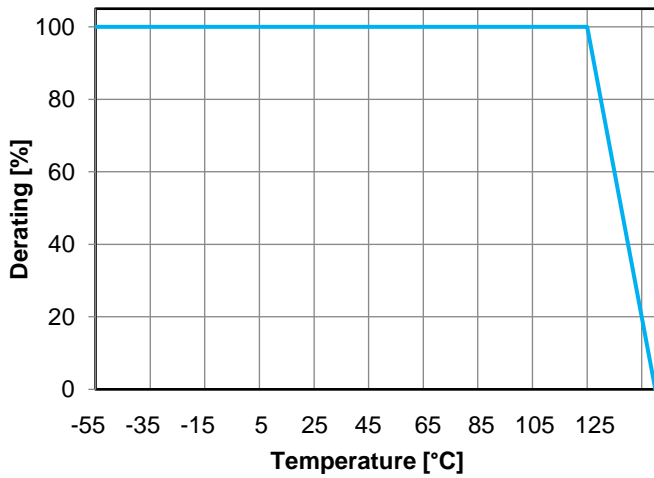

Power Derating

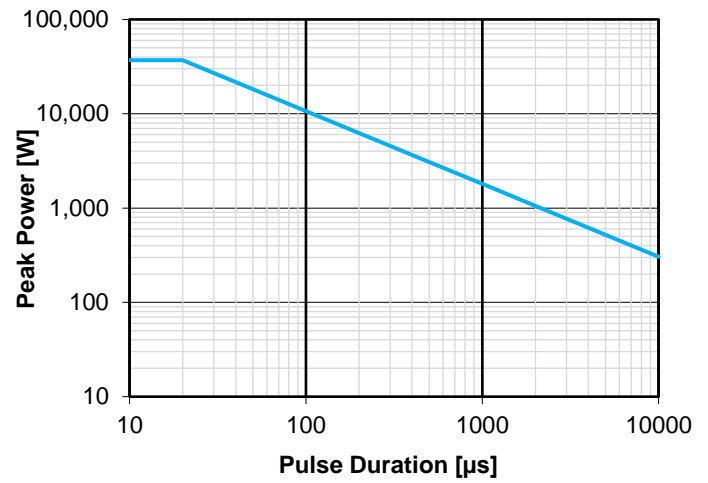

Voltage / Current

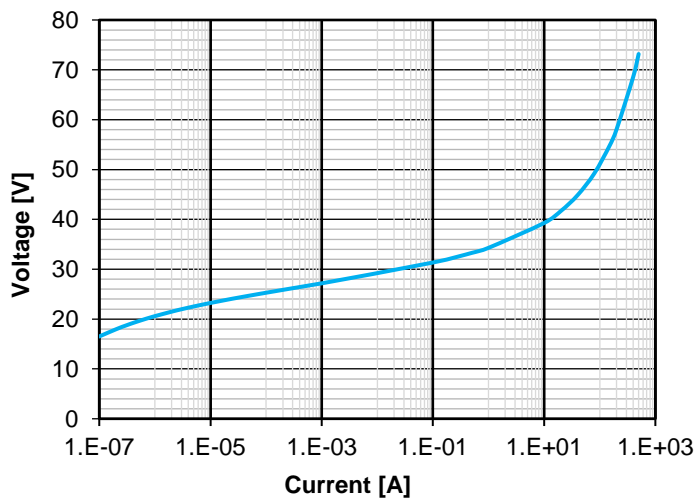

S21

